

Installation Details

Each fitting is supplied complete with mounting springs suitable for installation in plasterboard or wooden panel type surfaces, with shielded cable terminals.




Rear view of installed fitting

For added protection to cable connections to ZOL feeder/driver and for installation in solid surfaces, a recessing box is available. Mounting of fittings is effected by simply pushing the fitting into the box and allowing the spring clips to locate on the ribbed inner surface for a positive fit. Each box is provided with several “knock-outs” for cable entry.



Cat.No.
BOX60 Suitable for all sizes except “mini” versions

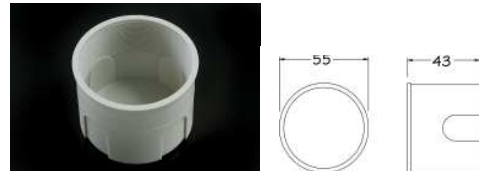

Cat.No.
BOX50 Suitable for Tango mini & Rueda mini



Cat.No.
ZOL6 6W 10V Driver
ZOL16 16W 10V Driver